



12V

820W

SLA

UPS  
AGM

## 12SB820WHR-FR

Rechargeable AGM Sealed Lead Acid Battery

### SPECIFICATIONS

Nominal Voltage	12V	
Nominal Power	15 min rate	
	820W/cell to 1.67V/cell	
Nominal Capacity		
20 hour rate	(11.5A to 10.50V)	230Ah
8 hour rate	(24.2A to 10.50V)	193.6Ah
5 hour rate	(37.4A to 10.20V)	187Ah
Weight	Approx. 66.4kg	
Internal Resistance (at 1KHz)	Approx. 2.2mΩ	
Maximum Discharge Current (5 secs)	1840A	
Short Circuit Current	4040A	
Charge Methods at 25°C		
Maximum Charging Current	69A	
Boost Charging Voltage	14.1V to 14.4V	
Boost Charge Time	8-9 hrs	
Float Charging Voltage	13.5V to 13.65V	
Coefficient -3.0mV/°C/Cell		
Operating Temperature Range		
Charge	-15°C to 40°C	
Discharge	-15°C to 50°C	
Storage	-15°C to 40°C	
Charge Retention (Shelf Life) at 20°C		
1 month	98%	
3 months	96%	
6 months	94%	
Case Material	UL94 V-0 Flame Retardant	
Termination	F18 (M8 Bolt)	
Torque Value of Terminal Hardware		
Recommended Torque Value	M8: 12 N-m (122kgf-cm)	
Max. Allowable Torque Value	M8: 20 N-m (204kgf-cm)	
Design Life	10-12 years	

Classified as a non-spillable battery.  
Approved for transportation by:

- Air (IATA/ICAO provision A67)
- Road
- Sea (per IMDG Special Provision 238)



Barcode




9319632521441




### DIMENSIONS

mm (inch)

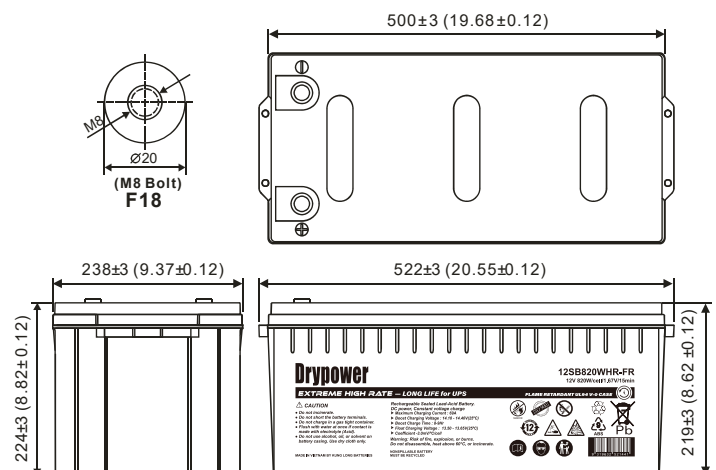


### CHARACTERISTICS CHARTS


Effect of Temperature on Capacity 25°C (77°F)

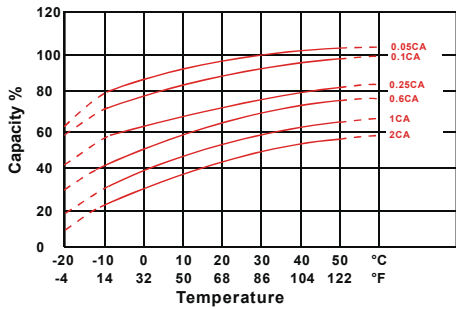


Capacity Retention Characteristic

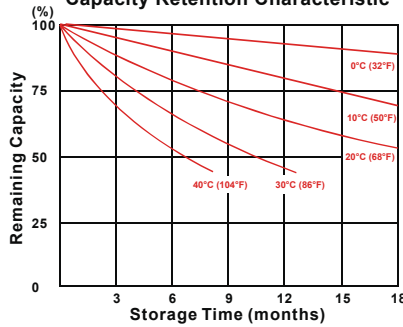

Trickle (or float) Service Life

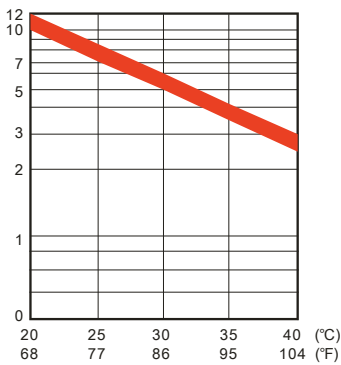

Discharge Time VS. Discharge Current (25°C)

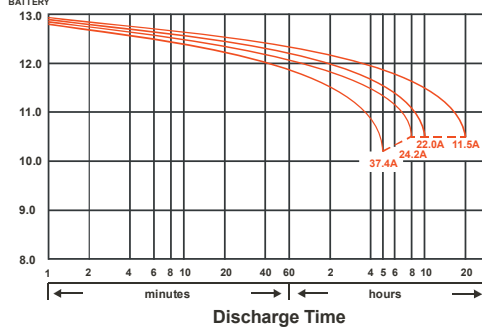

### FEATURES & BENEFITS

- ◆ Industry leading 99.99% pure lead content for superior service life and dependable performance.
- ◆ Specially formulated solder paste to ensure reliable power delivery.
- ◆ Maintenance free technology and non-spillable design.
- ◆ Special grid frame alloy design with outstanding anti-corrosion performance.
- ◆ Higher percentage of tin content compared with the industry standard. Tin extends battery standby life by minimising sulphation (corrosion) especially at higher temperatures.
- ◆ Manufactured by Kung Long Battery (KLB) at facilities in Taiwan and Vietnam. KLB is a leading manufacturer and complies with relevant international quality standards including ISO9001, CE ETL9000, UL1989, OHSAS18001 and ISO17025. KLB supports Green Sustainable supply chain practices.



### PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)						
End Voltage		1.85V	1.75V	1.70V	1.67V	1.60V
Time						
5	min	1024	1083	1142	1200	1259
10	min	829	874	919	964	1009
15	min	678	750	778	818	825
20	min	549	574	599	624	649
25	min	482	504	526	548	570
30	min	449	464	479	493	508
45	min	334	344	354	364	374
60	min	261	269	276	284	291

Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)						
End Voltage		1.85V	1.75V	1.70V	1.67V	1.60V
Time						
5	min	573	607	642	676	711
10	min	462	487	513	538	564
15	min	379	388	407	426	445
20	min	304.00	320	337	353	369
25	min	266	280	295	310	323
30	min	241	253	265	276	288
45	min	175	184	193	201	210
60	min	139	145	152	158	164

All data on the spec. sheet is an average value:

The tolerance range : X < 6min (+15%~-15%), 6min ≤ X < 10min (+12%~-12%), 10min ≤ X < 60min (+8%~-8%), X ≥ 60min (+5%~-5%)

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us. Oct2023